


VPV 5-1350 Screening Bucket

VPV 5-1350 is a vertical drum high-capacity screening bucket for various uses. Screening and crushing of aggregates are efficient with this bucket, favored by professionals.

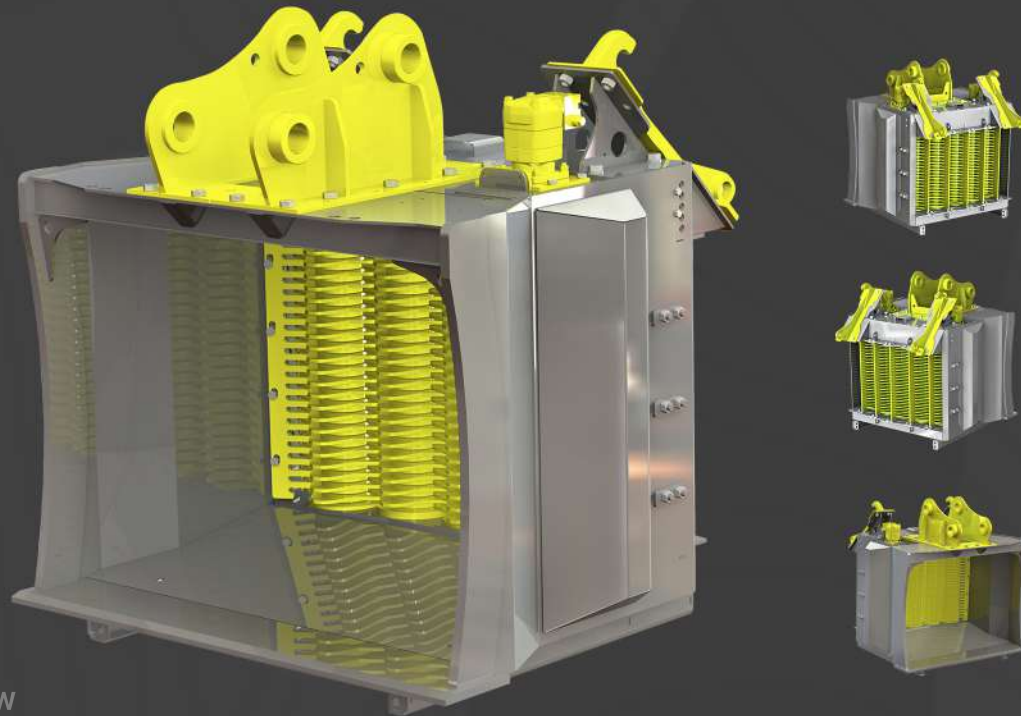

Specifications

Base Machine

Excavator: 22,000 - 28,000 kg
(44,000 - 62,000 lbs)

Wheel loader: 12,000 - 16,000 kg
(26,000 - 35,000 lbs)

Flow Rate

Oil Flow min – max: 120 - 250 l /min
(32 - 66 gal /min)

Pressure

Oil Pressure: 210/250 bar (3,000/3,600 psi)

Volume

ISO/SAE: 1.3 - 1.5 m³ (1.7 - 2 yd³)
Screen area: 1.2 m² (13 ft²)

Dimensions

Height: 1,500 mm (59.0 in)
Width: 1,550 mm (61.0 in)
Depth: 1,450 mm (57 1/10 in)

Weight

Without accessories: 1,700 kg (3,700 lbs)

Additional notes:

- Product Name: VP = Viper; H = Horizontal axles, V = Vertical axles; first number = number of axles, second number = axle length in mm.
- Base machine weight recommendations are suggestive. Check the suitable tipping load from the base machine user manual.
- Hydraulic flow values are indicative. Always verify the correct values for the application from the manufacturer.
- Product weight is based on a bucket without any additional equipment. Blade spacing and blade thickness may affect the weight.
- The oil pressure values are indicative. Always verify the correct values for the application from the manufacturer.
- Changes to document information without prior notice are reserved.

VIPER METAL
Efficiency With Finnish Excellence